


DESCRIPTION

The **MMA03-3001** is a connector suite which contains 3, 4, and 5 positions connectors. It can be used to connect EZmotion smart motors or driver modules to the power supply, the field bus and the I/O interface.

FEATURES

- Nominal Voltage (UL/IEC): 150V/130V
- Nominal Current (UL/IEC): 5A/10A
- Maximum Contact Resistance: 20mΩ
- Wire Diameter: 20-24AWG
- Operating Temperature Range: -40°C to 105°C

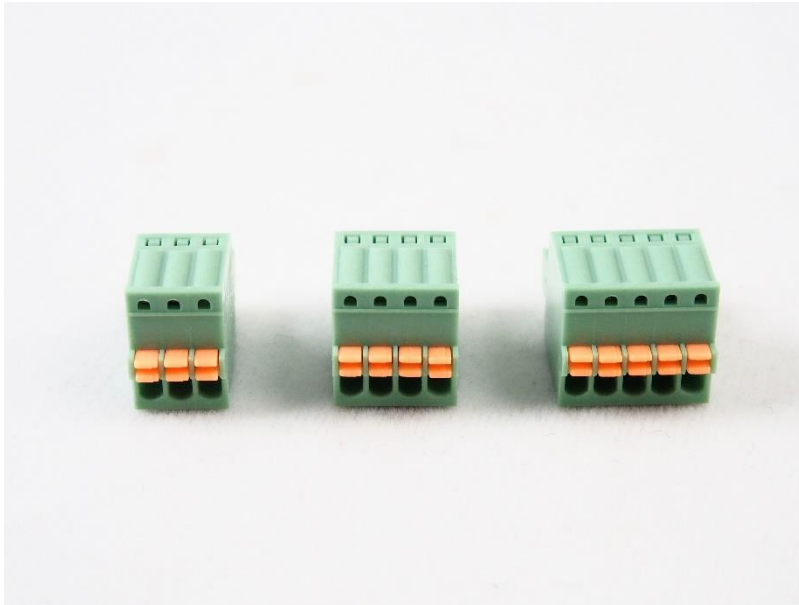

PRODUCT INFORMATION

MMA03-3001 contents are listed as below:

Part Number	Vendor	Component	Description	Quantity
MMA03-3001	KAIFENG	KF12EKD-2.5-3P-1G	2.5mm pitch, 3-positions connector	1
	KAIFENG	KF12EKD-2.5-4P-1G	2.5mm pitch, 4-positions connector	1
	KAIFENG	KF12EKD-2.5-5P-1G	2.5mm pitch, 5-positions connector	1

Notice: The information in this document is subject to change without notice. Please contact EZmotion for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating EZmotion products into any application. EZmotion will not assume any legal responsibility for any said applications.